

Towards efficient simulation of turbulent flows and noise in rotating machines

I. Abalakin¹, V. Bobkov¹, V. Tsvetkova¹, B. Sauvage², F. Miralles³, T. Kozubskaya¹, S.F. Wornom³, B. Koobus³, A. Dervieux^{4,*}

^{1,*}CAALAB, Keldysh Institute of Applied Mathematics, 4, Miusskaya Sq., Moscow, 125047, Moscow, ilya.abalakin@gmail.com, veld13@gmail.com, valeria.tsvetkova@gmail.com, tatiana.kozubskaya@gmail.com,


²Univ. Côte d'Azur/INRIA Projet Ecuador, Sophia-Antipolis, France. Bastien.Sauvage@inria.fr

³IMAG, Univ. Montpellier, CNRS, Place Eugène Bataillon, 34090 Montpellier, France. florian.miralles@umontpellier.fr, stephen.wornom@inria.fr, bruno.koobus@umontpellier.fr

⁴Lemma, Biot, France, and Univ. Côte d'Azur/INRIA Projet Ecuador, Sophia-Antipolis, France, alain.dervieux@inria.fr

ABSTRACT

The Norma project aims to the simulation, and then reduction, of noise in existing and future rotating machines in urban areas. Among Norma advances, the proposed communication will cover some physical models and numerical methods (improved LES and DES hybrid models [1], improved RANS approximations of higher accuracy, mesh and analytic methods for rotating geometries) useful for predicting the flow around an helicopter main rotor. ROBIN (Rotor-Body Interaction) fuselage equipped with the scaled Caradonna-Tung two-blade rotor is taken as a model configuration. The immersed boundary method is based on Brinkman penalization functions and building the tetrahedral mesh by moving mesh adaptation to the fuselage surface [2], [3]. The techniques allow keeping the initial mesh topology.

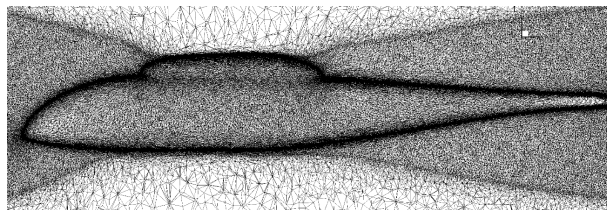

REFERENCES

- [1] C. Moussaed, M.V. Salvetti, S. Wornom, B. Koobus and A. Dervieux, Journal of Fluids and Structures, Volume 47, 2014, pages 114-123.
- [2] Garanzha V.A., Kudryavtseva L. Moving Deforming Mesh Generation Based on the Quasi-Isometric Functional. Lecture Notes in Computational Science and Engineering, Vol. 143. Springer.
- [3] Tsvetkova V., Kozubskaya T., Kudryavtseva L., Zhdanova N., On mesh adaptation for supercomputer simulation of flows around solid bodies defined by immersed boundary method. Procedia Computer Science, Vol. 178, 2020, P. 404-413