

# MP1.1


## Caradonna-Tung rotor\*

**NO**ise of **R**otating **M**achines (**NORMA**)

**WP1** Evaluation of hybrid RANS-LES methods of scale-resolving simulation of turbulent flows developed by partners, their further development and adaptation to the problems of turbulent flow past rotating rotor blades of helicopters.

\*Caradonna F. X., Tung C. Experimental and analytical studies of a model helicopter rotor in hover: tech. rep. ; NASA. — Ames Research Center, Moffett Field, California, Sept. 1981. — NASA-TM-81232.

# Case description


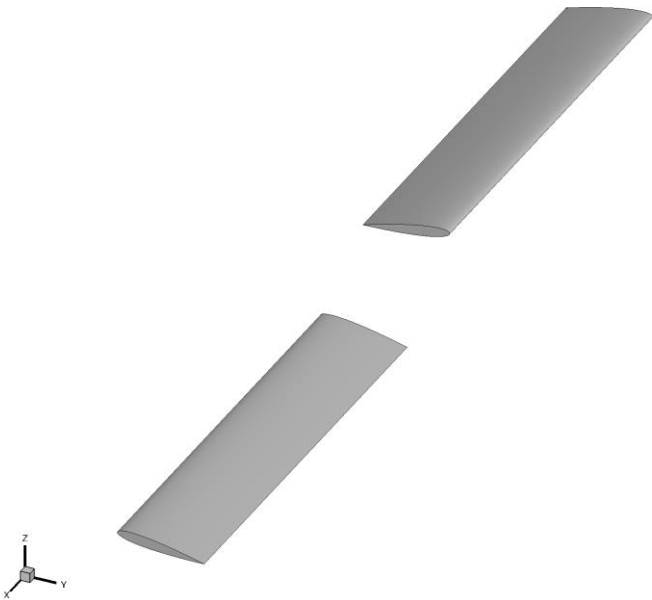


$N$ – blades number	<b>2</b>
$R$ – rotor radius	<b>1.143 m</b>
$b$ – blade chord length	<b>0.1905 m</b>
blade base airfoil	<b>NACA-0012</b>
pitch angle	<b>8°</b>
rotation speed	<b>650 RPM</b>
blade tip velocity $V_{tip}$	<b>77.8 m/s</b>
tip Mach	<b>0.228</b>



$$\rho_0 = 1.2041 \text{ kg/m}^3, \mu_0 = 1.827 \times 10^{-5} \text{ N} \cdot \text{s/m}^2$$

$$\text{Re} = \frac{\rho_0 V_{tip} b}{\mu_0} = 0.97 \times 10^6$$

# Aerodynamics: RANS vs. IDDES



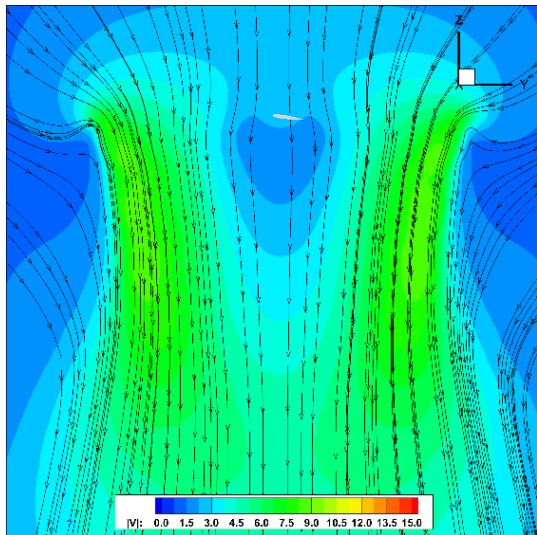
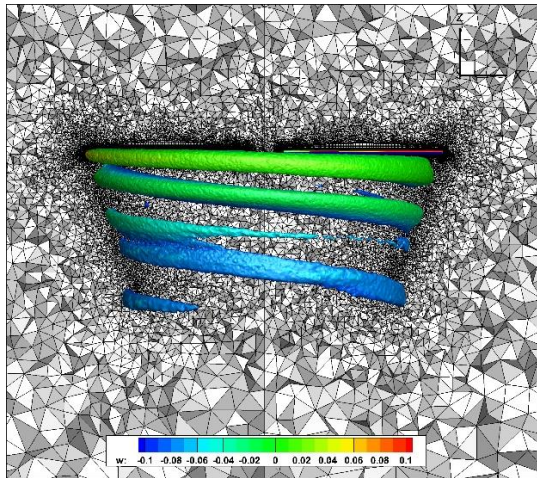


**Preliminary RANS-case (3.5M nodes)**


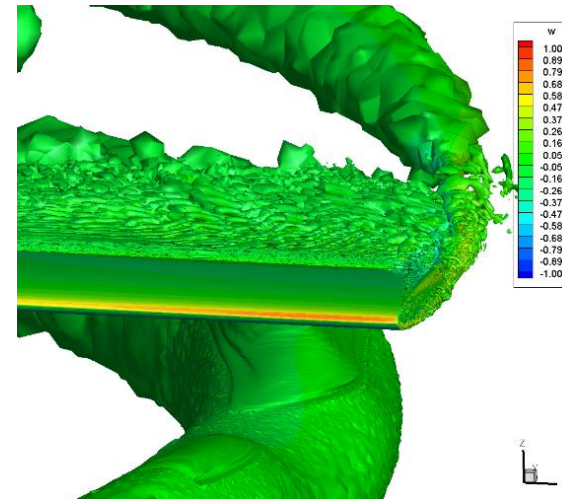
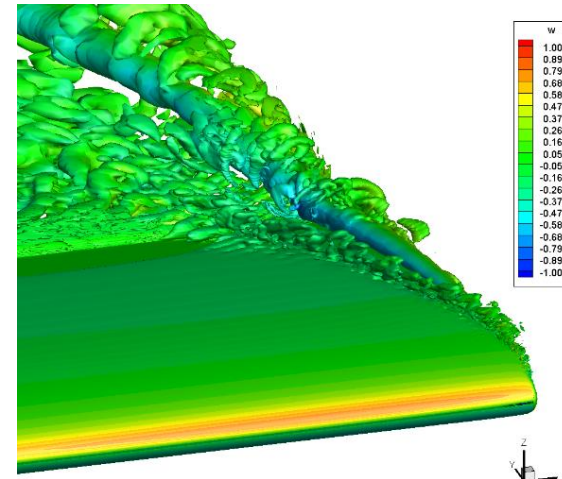


**IDDES-case (92.5M nodes)**


# Aerodynamics: RANS vs. IDDES

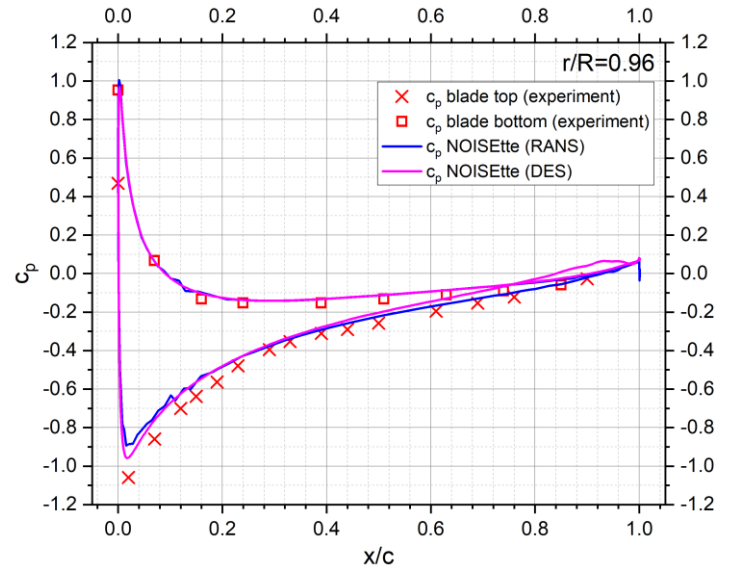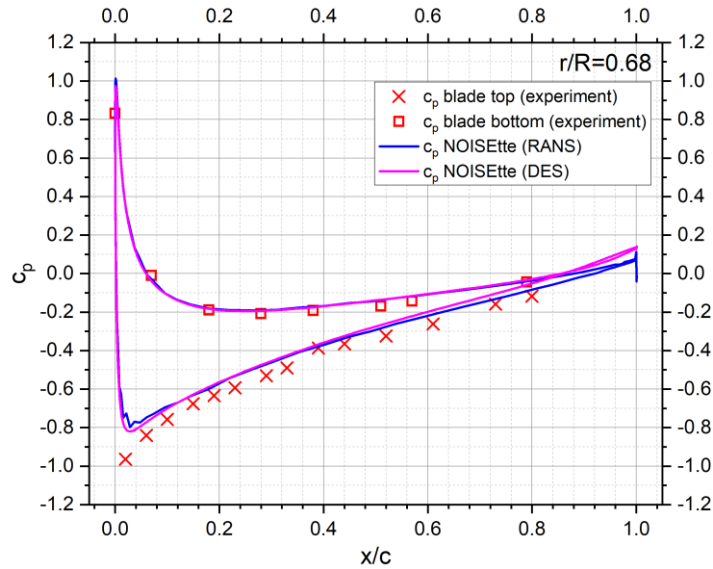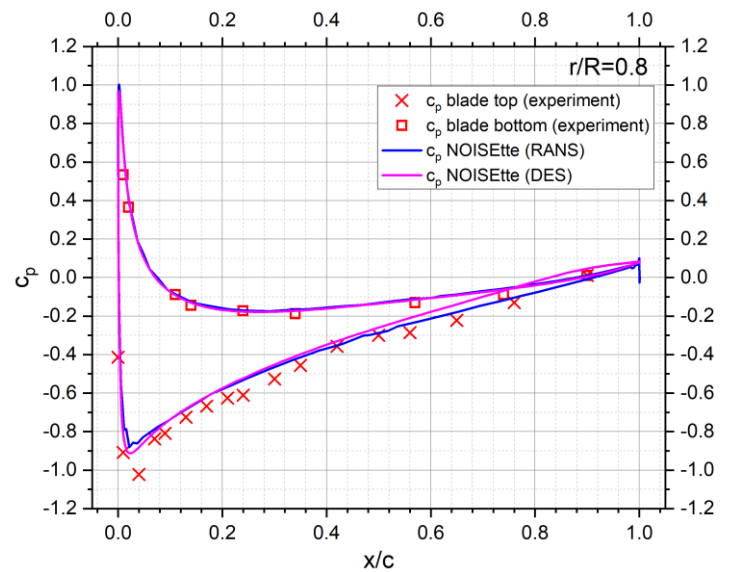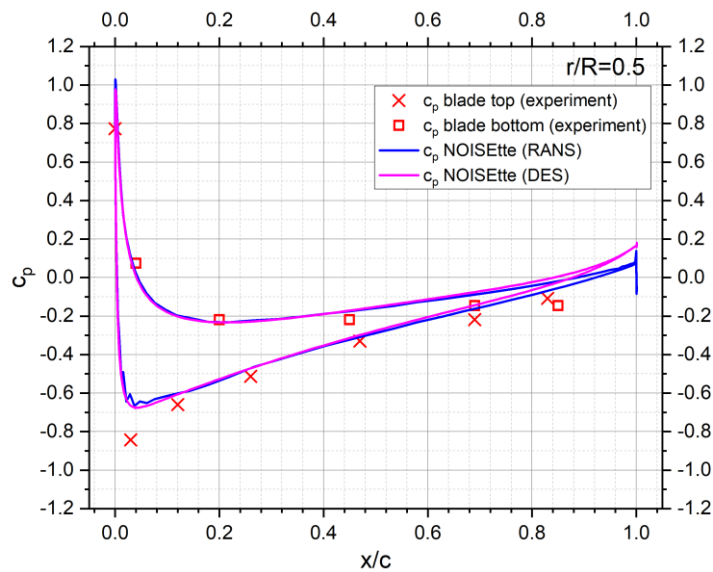

# Acoustics: FWH control surface


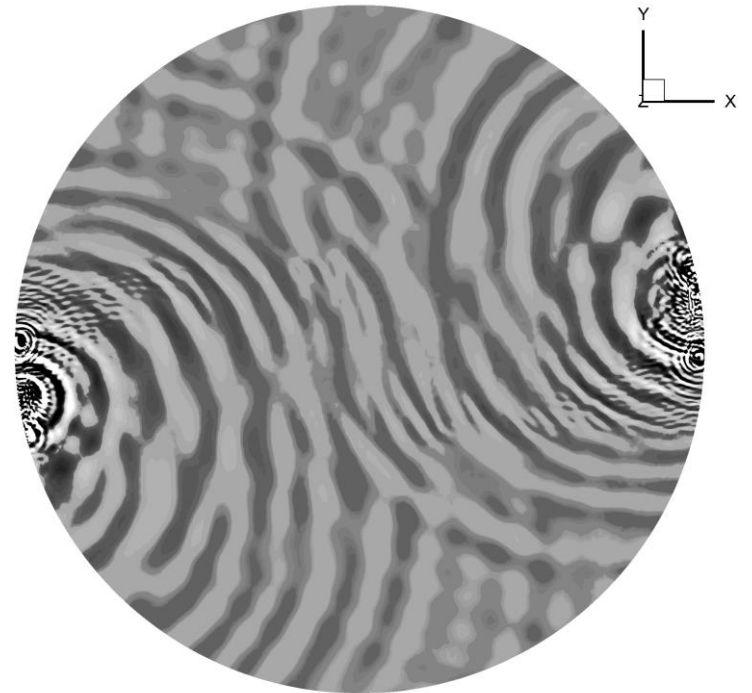
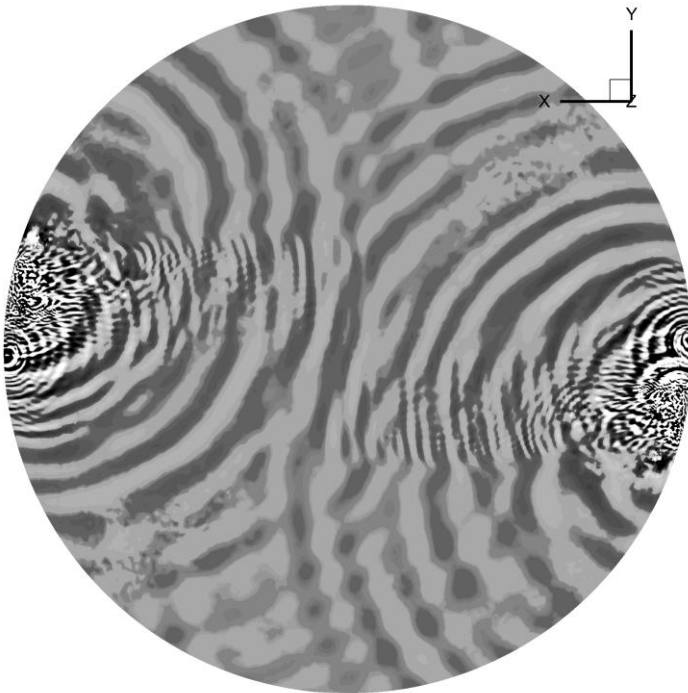
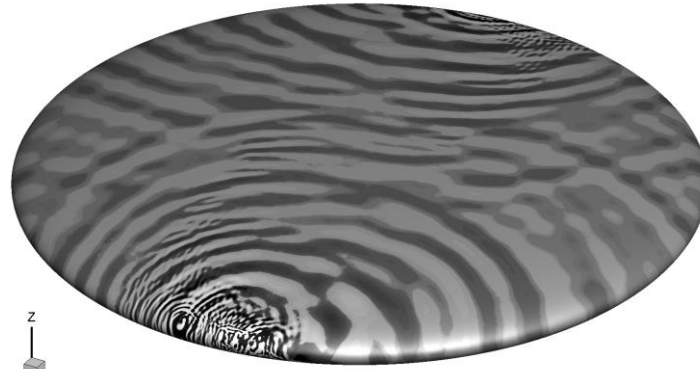


# Workflow: MP1.3

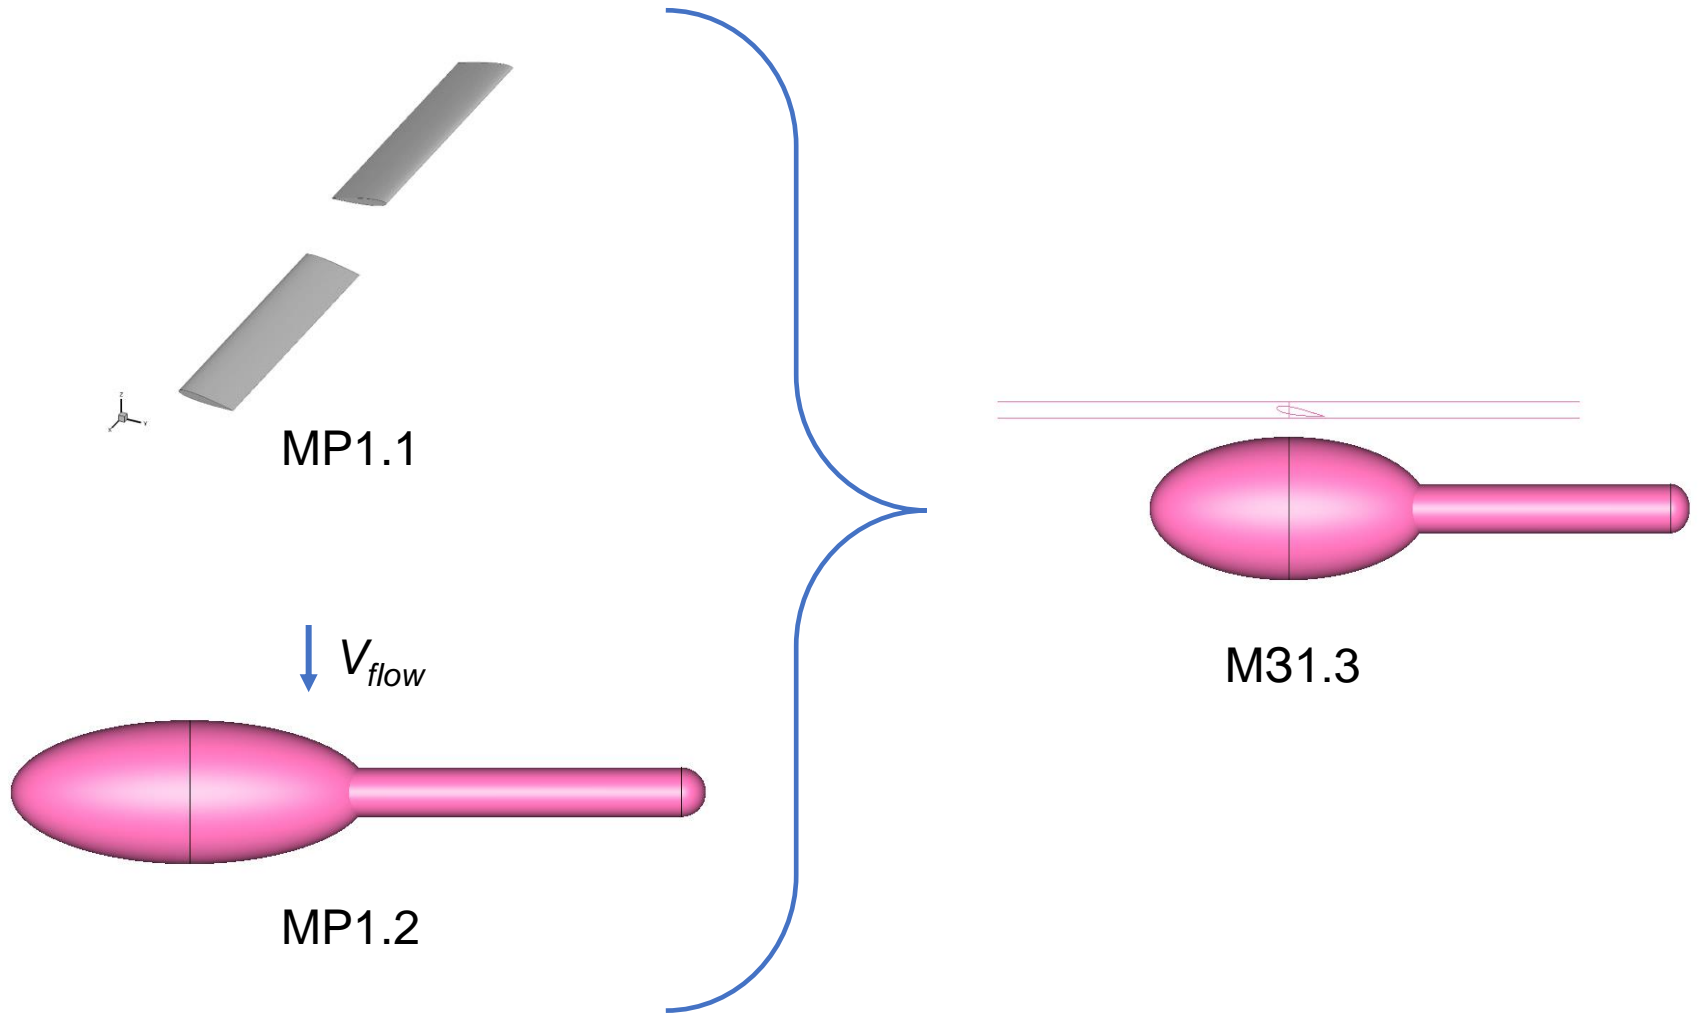





# Problem setup: MP2.1, MP2.2

## APC Slow Flyer 10x4.7 rotor geometry

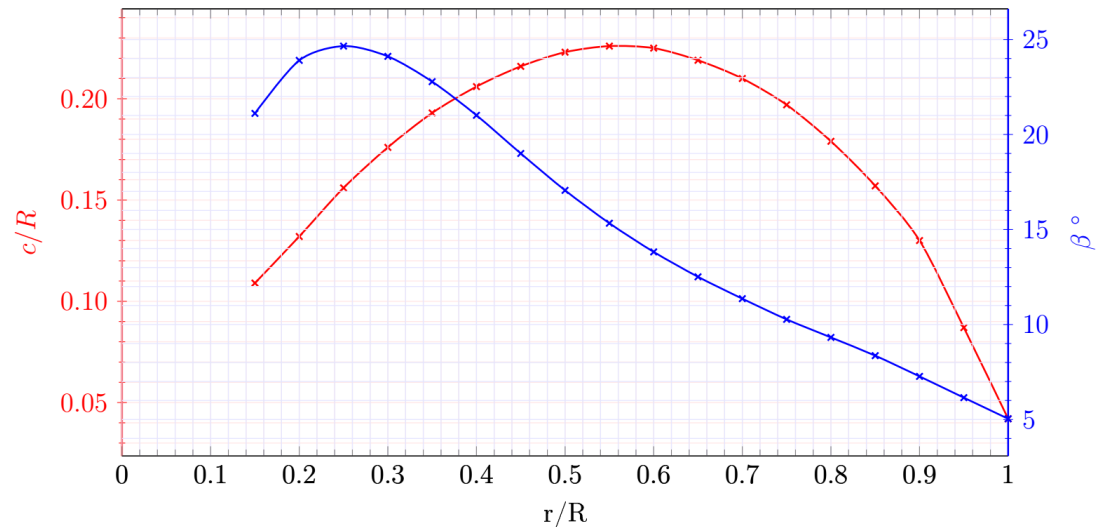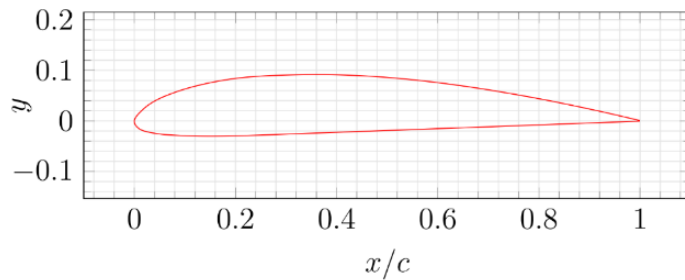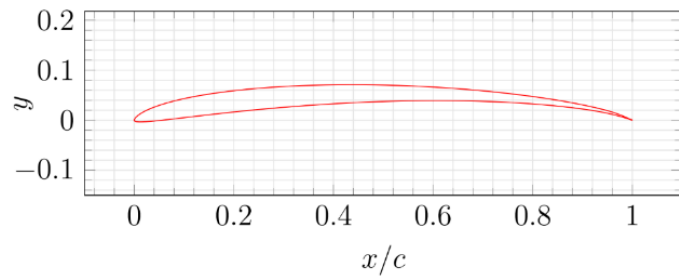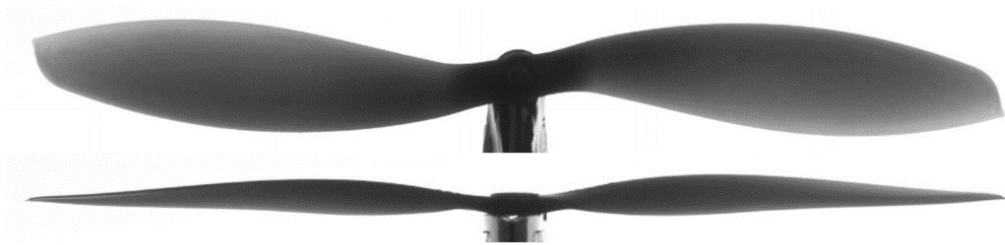

# Problem setup: MP2.1, MP2.2

## APC Slow Flyer 10x4.7 exp. data

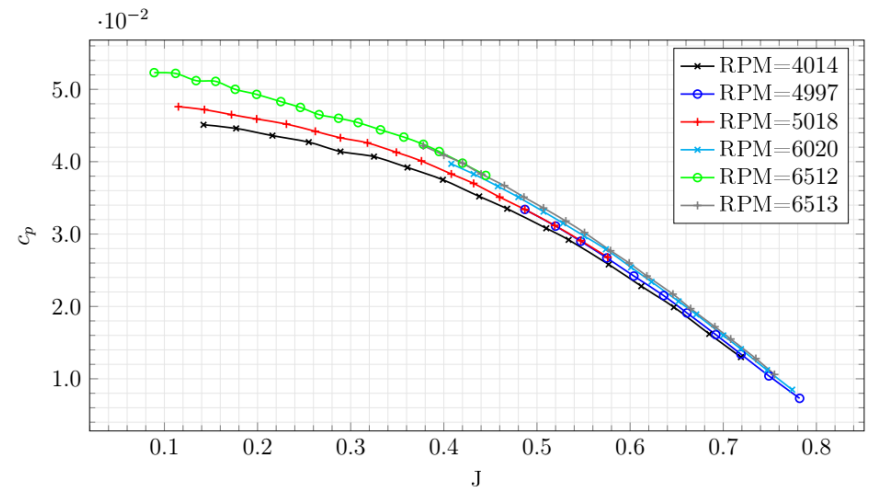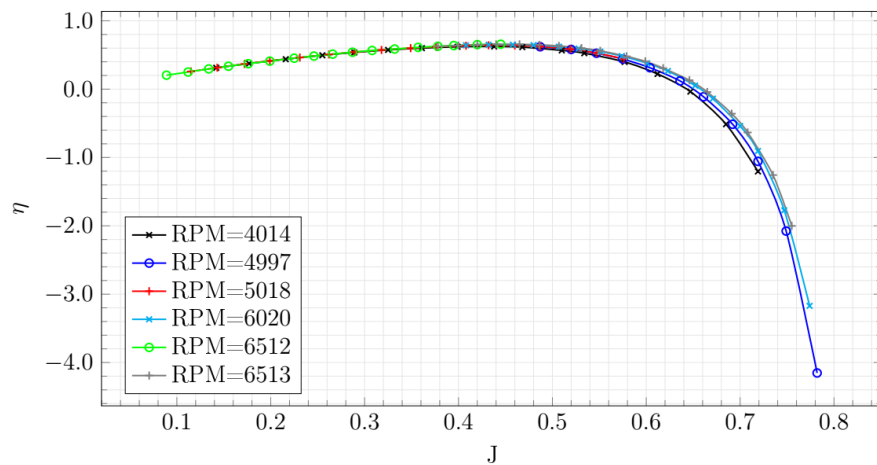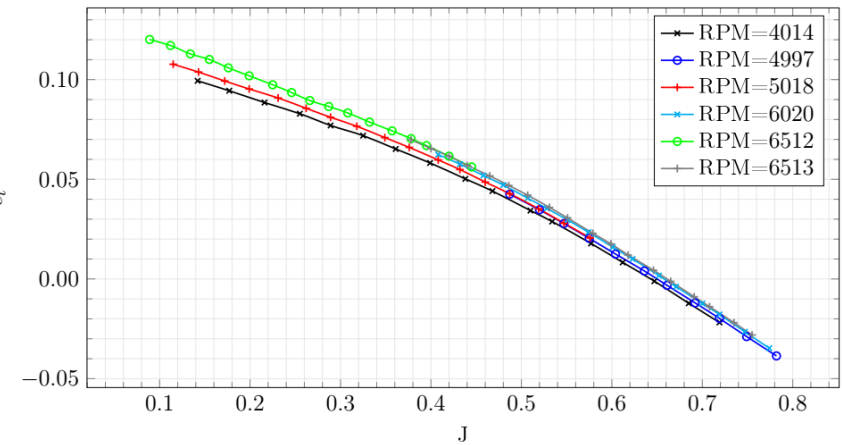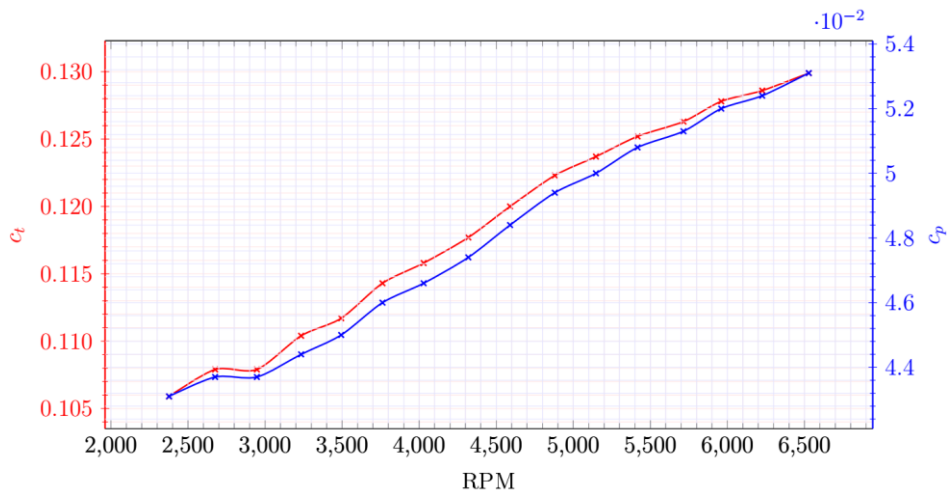



# Problem setup: MP2.3

## Typical quadcopter fuselage + 4 rotors

